

Since the usage and finishing of the product is not under our control, we accept no liability for the success of the work and can therefore only guarantee the nature of our products as per the accompanying product data sheets and in accordance with our general terms and conditions of sale. The properties listed here represent no guarantee with respect to the eventual use of our products. We reserve the right to make changes due to technical advances. Any other technical information given in the course of a consultation must be confirmed in writing. Colours shown here are restricted by the printing techniques and may differ from those exhibited by the products themselves. We also reserve the right to make alterations to the product technology or design. Only the current version of this data sheet is valid. Such versions are accessible by anyone via the internet. The issue of the latest data sheet invalidates all those that have been published beforehand.


# DIAMONDTRED

1/2

## Anti-slip safety insert

- Information Sheet -

**DURAL**



### MATERIAL:

DIAMONDTRED is made from a special blend of PVC, silica quartz and polymeric plastic and is characterised by its high resilience and excellent properties:

- Outstanding slip resistance exceeds international standards
- Slip resistant in wet and dry conditions
- Extreme wear resistance
- Resistant to sunlight
- Resistant to deformation and tension
- Easy installation thanks to self-adhesive backing
- Large selection of colours – safety or subtle shades

### INSTALLATION:

The safety insert is manufactured with a self adhesive backing. The insert is installed by removing the backing paper and then pressing it firmly into the profile.

### CARE:

DIAMONDTRED features a polyurethane coating which reduces dirt retention. The three dimensional pyramid pattern provides excellent slip resistance in the wet but requires more care than a smooth flooring surface. Cleaning is best achieved by scrubbing with a hard bristle brush in conjunction with warm soapy water or with suitable cleaning machines.

### COLOURS:



101 safety white



102 safety orange\*



103 safety green



104 safety red



105 safety blue



118 signal yellow

DURAL GmbH

Südring 11

D-56412 Ruppach-Goldhausen


Tel. +49 (0) 2602/9261-0

Fax +49 (0) 2602/9261-50

info@dural.com

## Anti-slip safety insert

- Information Sheet -

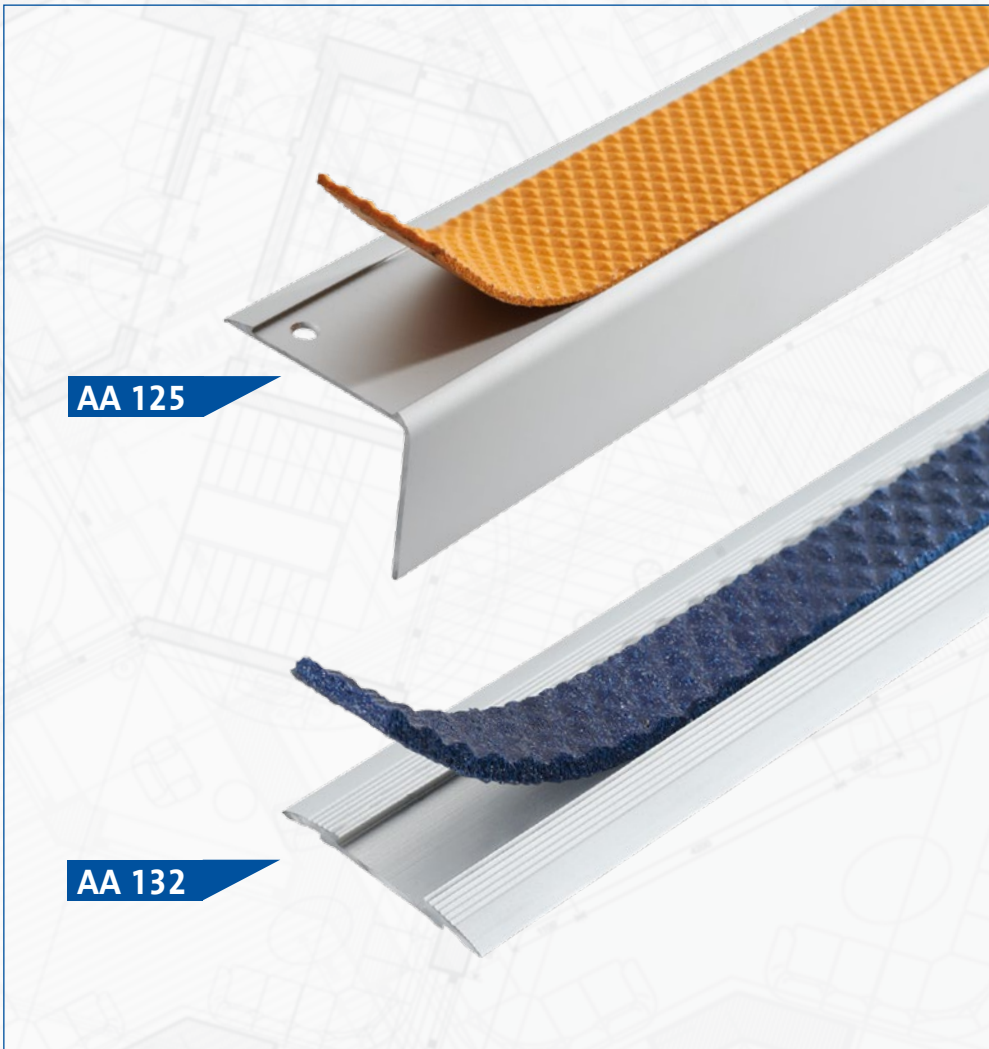

AA 125

AA 132

### COLOURS:



106 neutral black



107 charcoal grey



108 light grey



109 rich brown



110 putty



111 royal blue



112 burgundy



113 mid grey



114 jade green



119 chevron safety orange\*



121 chevron signal yellow



116 night glow



117 super night glow

### PRODUCT DATA:

MATERIAL:	Special blend of PVC, silica quartz and polymeric plastic
INSTALLATION TEMPERATURE:	≥ 15 °C
DIMENSIONAL STABILITY:	80°C for 6 hours / 0.12%
MOISTURE MOVEMENT:	23°C for 24 hours / 0.02%
HEAT AGEING:	70°C for 15 days
SLIP RESISTANCE:	Work areas / work rooms: R10 / V6 Wet barefoot areas: Class B
FLAMMABILITY:	Class B1
RESISTANCE PROPERTIES:	Resistant to ultraviolet light, oil, grease, petrol, salt, dilute acids and alkalis, common household chemicals and detergents. Organic solvents will soften DIAMONDRED insert.

\* Testcertificates are available on request.

DURAL GmbH

Südring 11

D-56412 Ruppach-Goldhausen

Tel. +49 (0) 2602/9261-0

Fax +49 (0) 2602/9261-50

info@dural.com