

Since the usage and finishing of the product is not under our control, we accept no liability for the success of the work and can therefore only guarantee the nature of our products as per the accompanying product data sheets and in accordance with our general terms and conditions of sale. The properties listed here represent no guarantee with respect to the eventual use of our products. We reserve the right to make changes due to technical advances. Any other technical information given in the course of a consultation must be confirmed in writing. Colours shown here are restricted by the printing techniques and may differ from those exhibited by the products themselves. We also reserve the right to make alterations to the product technology or design. Only the current version of this data sheet is valid. Such versions are accessible by anyone via the internet. The issue of the latest data sheet invalidates all those that have been published beforehand.

DURAFLEX

1/2

Cover profile for retrofit installation with fastening clips for walls and floors – KE/KF series

- Information Sheet -

DURAL





APPLICATION

Cover profiles for installation of floor joints retrospectively. Fixing with clips made from stainless steel. For floor fixing we recommend using a clip approx. every 30 cm. For wall fixing please use a clip approx. every 60 cm. Please order the fastening clips separately with each order. Please observe the joint depth: Type A = 40 mm deep, Type B = 60 mm deep. The cover profiles are available in anodised aluminium and PVC as well as different widths and corner fittings. In the case of larger joint lengths, the profiles must be closely abutted.

For all products and materials, the following applies: The suitability of the material with regard to the expected mechanical loading and chemical exposure must be investigated carefully in each individual case. The generally recognised rules of good engineering practice must always be observed!

MAINTENANCE:

The DURAFLEX cover profiles do not require any special maintenance. If required clean the surface with a neutral cleaner and wipe it dry. Please do not use any acidic and alkaline cleaners.

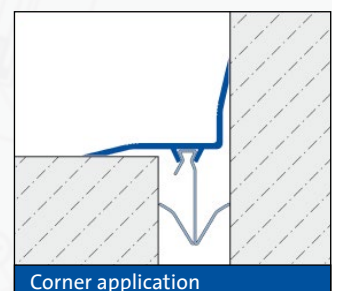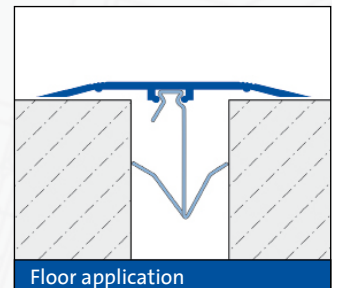

Alu silver

PVC beige

PVC grey

PVC white

DURAL GmbH

Südring 11

D-56412 Ruppach-Goldhausen

Tel. +49 (0) 2602/9261-0

Fax +49 (0) 2602/9261-50

info@dural.com

EXP 06/2015

Resistant to chemicals

Weather-resistant

Light stress


Medium stress

Heavy stress

www.dural.com


Cover profile for retrofit installation with fastening clips for walls and floors – KE/KF series

- Information Sheet -

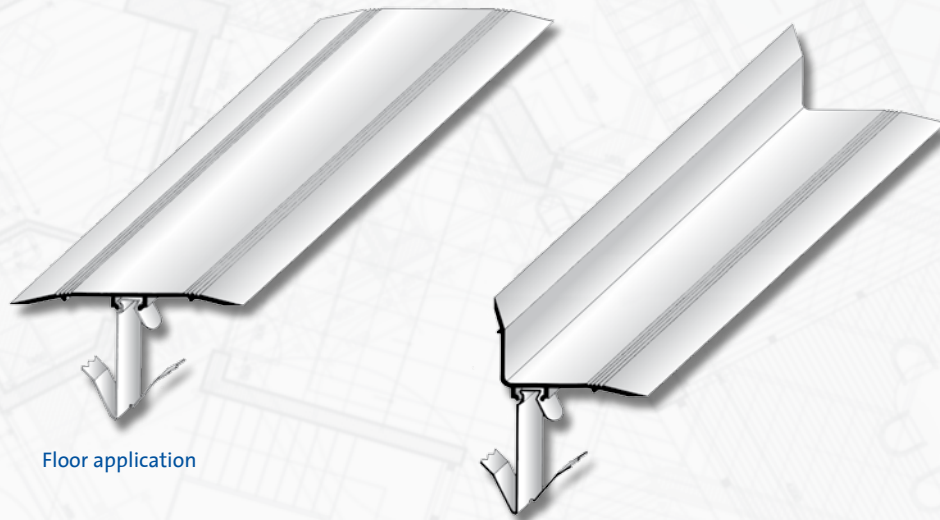


Floor application

Corner application

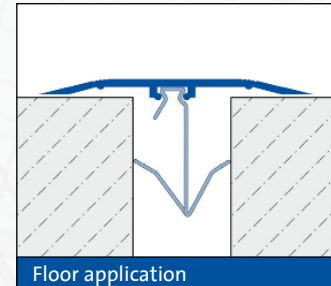

Floor application

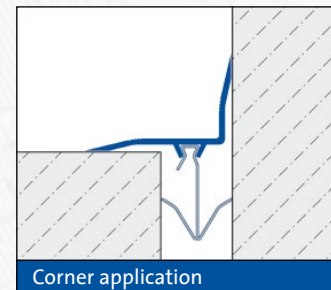

Corner application


Quantity fixing clips **floor** = use a clip approx. every 30 cm

Quantity fixing clips **wall** = use a clip approx. every 60 cm


Joint width	Profile width	Clip
15 - 20 mm	50 mm	Type A
20 - 30 mm	60 mm	Type A
25 - 35 mm	70 mm	Type B
30 - 45 mm	90 mm	Type B

Joint width	Profile width	Clip
15 - 30 mm	50 mm	Type A
20 - 45 mm	60 mm	Type B
30 - 45 mm	70 mm	Type B
35 - 45 mm	90 mm	Type B
40 - 45 mm	140 mm	Type B

min./max. Joint width Type A generally: 15 / 30 mm
min./max. Joint width Type B generally: 20 / 45 mm

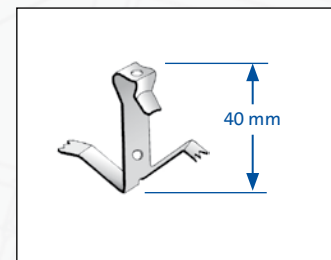

Fixing clip Type A

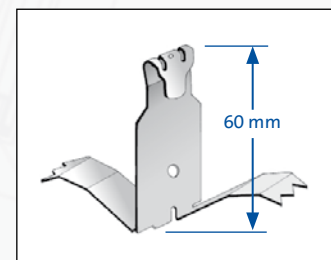

Fixing clip Type B

PRODUCT DATA:

MATERIAL:	Serie KE = Aluminium anodised reinforced Serie KF = Aluminium silver anodised / PVC
COLOUR (PVC):	white / beige / grey
PROFILE WIDTH:	Serie KE = 60 / 70 mm (Aluminium reinforced) Serie KF = 50 / 60 / 70 / 90 / 140 mm (Aluminium anodised) Serie KF = 50 / 70 mm (PVC)
PROFILE LENGTH:	300 cm
JOINT WIDTH:	15-25 mm = profile width 60 mm 15-35 mm = profile width 70 mm 35-60 mm = profile width 90 mm
FIXING CLIP:	Stainless steel V2A nature (ordered separately) Type A: for joint width 15–30 mm, clip height 40 mm Type B: for joint width 20–45 mm, clip height 60 mm Quantity fixing clips floor = use a clip approx. every 30 cm Quantity fixing clips wall = use a clip approx. every 60 cm

DURAL GmbH

Südring 11

D-56412 Ruppach-Goldhausen

Tel. +49 (0) 2602/9261-0

Fax +49 (0) 2602/9261-50

info@dural.com