

Since the usage and finishing of the product is not under our control, we accept no liability for the success of the work and can therefore only guarantee the nature of our products as per the accompanying product data sheets and in accordance with our general terms and conditions of sale. The properties listed here represent no guarantee with respect to the eventual use of our products. We reserve the right to make changes due to technical advances. Any other technical information given in the course of a consultation must be confirmed in writing. Colours shown here are restricted by the printing techniques and may differ from those exhibited by the products themselves. We also reserve the right to make alterations to the product technology or design. Only the current version of this data sheet is valid. Such versions are accessible by anyone via the internet. The issue of the latest data sheet invalidates all those that have been published beforehand.




TREDSAFE

1/3

DURAL

Stair nosing profile for safety anti-slip inserts for subsequent installation / renovation

- Information Sheet -

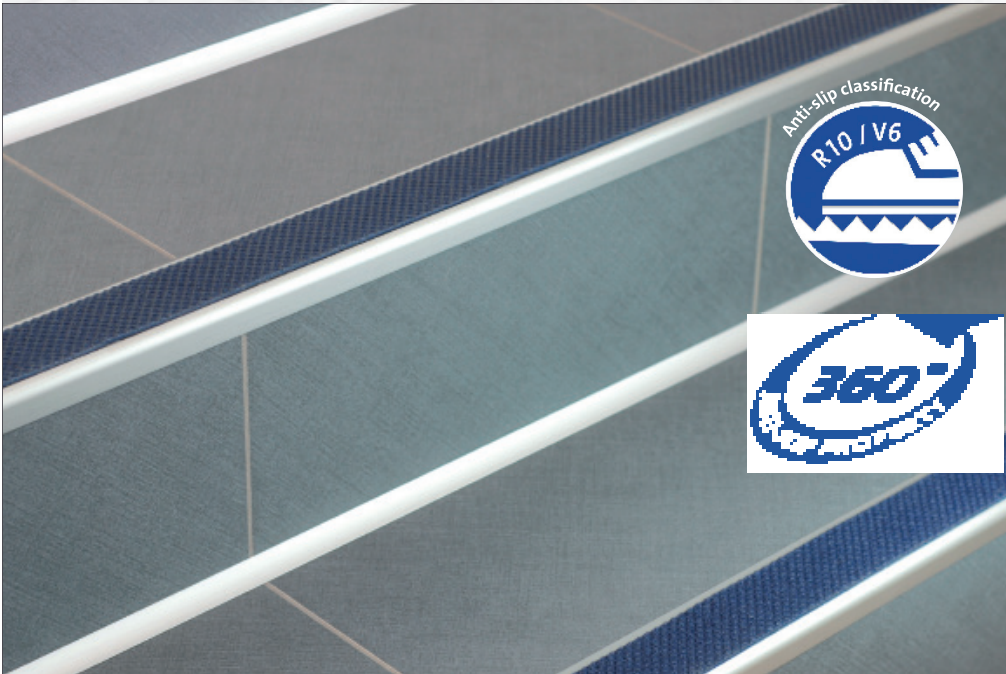


APPLICATION:

TREDSAFE are stair nosing profiles in aluminium or V2A stainless steel for use with DIAMOND-TRED safety inserts and are suitable for retrofitting in all existing stair flooring surfaces.

Five different constructions in a wide range of variants are available to fit every application area:


- with extra-flat ramped edge, e. g. for tiled and natural stone surfaces
- with a ramped edge on both sides, e. g. for tactile attention and warning markings
- with flush butt joint, e.g. for thin flooring types
- with varying step edge forms, e. g. to cover defective step edges
- with integrated flooring inlet slot, e. g. for fitted carpets

All TREDSAFE profiles are installed either using screws or adhesive bonding.



INSTALLATION:

TREDSAFE step-nosing profiles and DIAMOND-TRED inserts are quick and easy to install. The profiles are supplied pre-drilled to facilitate screw fixing. Damaged steps should be repaired prior to fixing the step-nosing profile. The safety insert is manufactured with a self adhesive backing. The insert is installed by removing the backing paper and then pressing it firmly into the profile.



PRODUCT DATA:

MATERIAL:	Aluminium silver anodised, stainless steel V2A
LENGTH:	250, 300 cm
FOR INSERTS:	1 x 13 / 2 x 13 / 3 x 13 mm 1 x 37 / 2 x 37 mm 1 x 43 / 2 x 43 mm 1 x 53 mm


DURAL GmbH
Südring 11
D-56412 Ruppach-Goldhausen
Tel. +49 (0) 2602/9261-0
Fax +49 (0) 2602/9261-50
info@dural.com

Stair nosing profile for safety anti-slip inserts for subsequent installation / renovation


- Information Sheet -



TREDSAFE profiles with a flat to zero sloping contour at the back edge

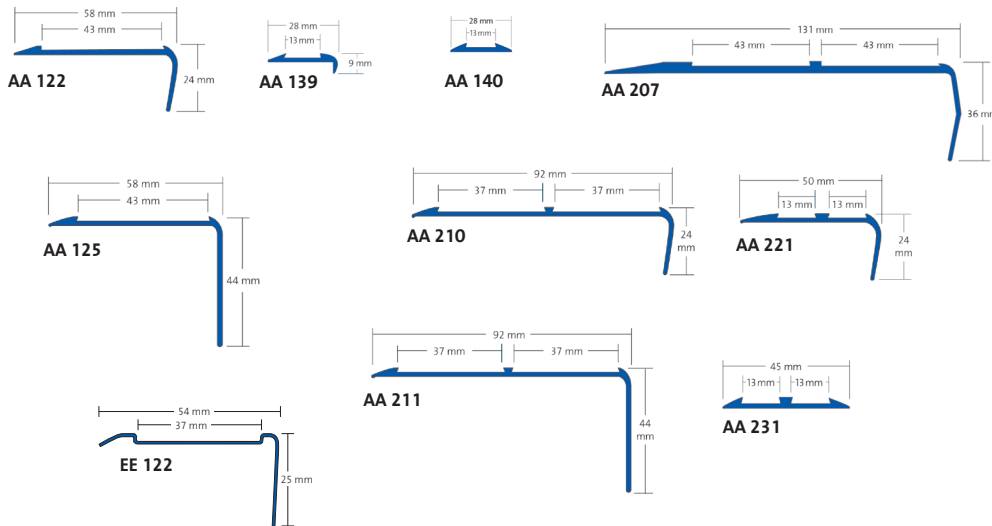

TREDSAFE profiles with flush butt joints for neat flooring transitions

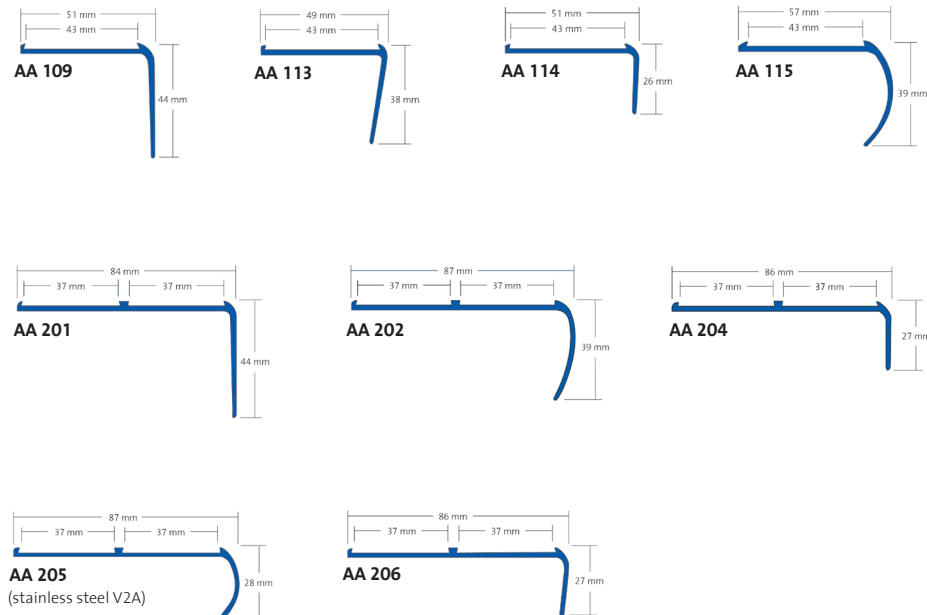

Tiled stairs



Parquet stairs



Pu resin stairs



Laminate stairs



DURAL GmbH

Südring 11

D-56412 Ruppach-Goldhausen

Tel. +49 (0) 2602/9261-0

Fax +49 (0) 2602/9261-50






info@dural.com

Stair nosing profile for safety anti-slip inserts for subsequent installation / renovation

- Information Sheet -




TREDSAFE profiles for a wide range of step edge contours

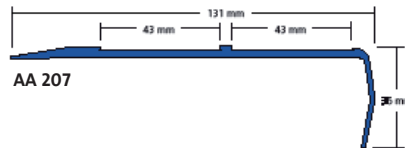




Parquet stairs




Linoleum stairs

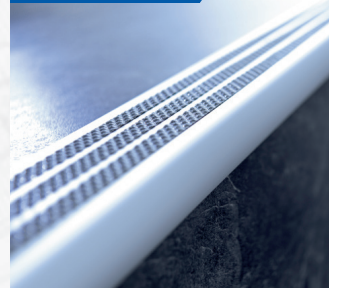

TREDSAFE profiles with integrated inlet slots for flooring



Carpeted stairs

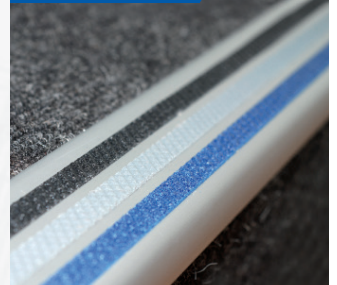

DURAL GmbH
 Südring 11
 D-56412 Ruppach-Goldhausen
 Tel. +49 (0) 2602/9261-0
 Fax +49 (0) 2602/9261-50
 info@dural.com