


GULLIES HORIZONTAL OUTLET

P.066L GULLY 100x100,
OUTLET \varnothing 40 mm

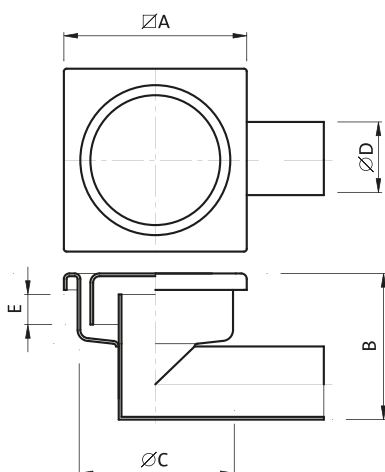

Features


Finish: **Sand-blast** or polished.

N.B.:

Available 150x150mm Version
outlet \varnothing 50mm

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Concentrated load	Distributed load	
P.066L	100	90	85	40	15	200		12
P.062L	100	105	85	40	33	200		12

P.028L GULLY 150x150,
OUTLET \varnothing 50 mm

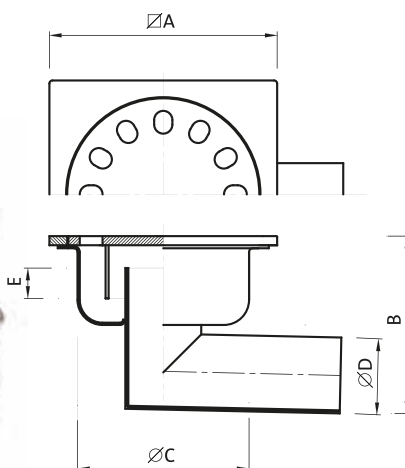


Features

Finish: **Sand-blast**

Also available with or without basket and with
cover fastened with a screw.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Concentrated load	Distributed load	
P.028L	150	115	110	50	20	1000	5000	38
P.024L	150	130	110	50	35	1000	5000	38

P.014L GULLY 200x200,
OUTLET \varnothing 63,5 mm

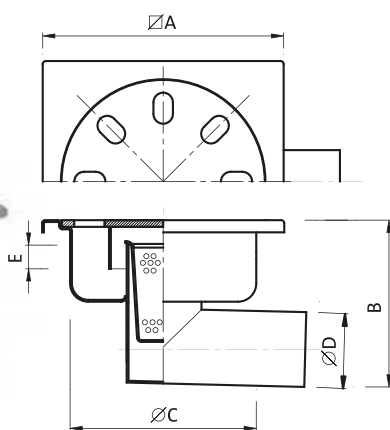


Features

Finish: **Sand-blast**

Also available with or without basket and with
cover fastened with a screw.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Concentrated load	Distributed load	
P.014L	200	125	150	63,5	25	850	4600	46
P.002L	200	150	150	63,5	50	850	4600	46

P.030L GULLY 250x250,
OUTLET \varnothing 76/80 mm

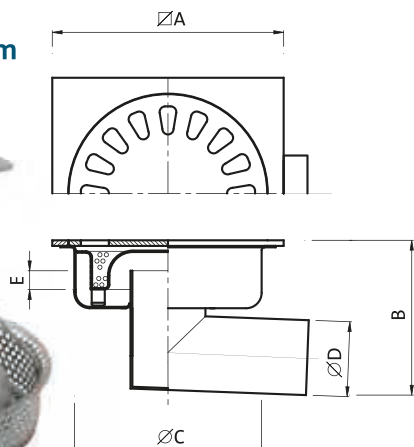

Features

Finish: **Sand-blast**


Also available with or without basket and with
cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Concentrated load	Distributed load	
P.030L	250	175	195	76	25	850	6500	80
P.016L	250	200	195	80	50	850	6500	80

P.030L/2

**GULLY 250x250,
OUTLET
Ø 76/80 mm**

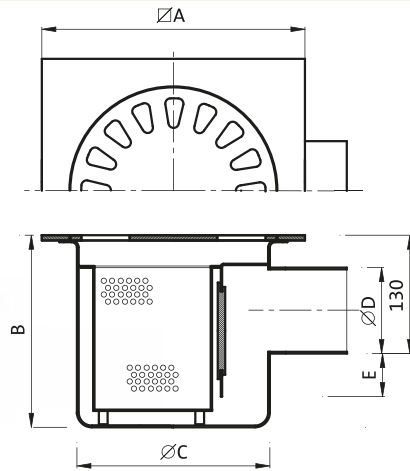

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P030L/2	250	250	195	76 80	60	850	6500	80

P.006L

**GULLY 300x300,
OUTLET
Ø 101,6/110 mm**

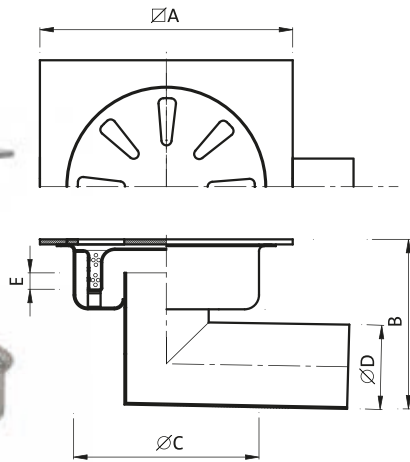

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P.006L	300	200	220	101,6 110	30	850	6500	130
P.005L	300	240	220	101,6 110	60	850	6500	130

P.006L/2

**GULLY 300x300,
OUTLET
Ø 101,6/110 mm**

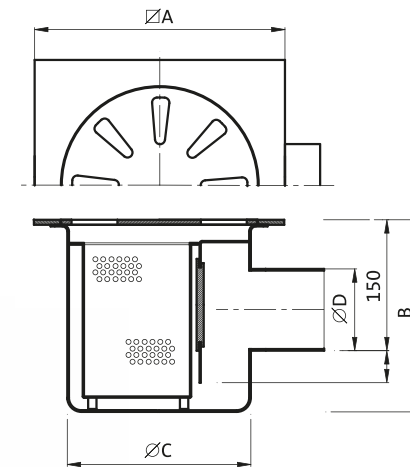

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P006L/2	300	250	220	101,6 110	60	850	6500	130

P.012L

**REINFORCED
GULLY 300x300,
OUTLET
Ø 101,6/110 mm**

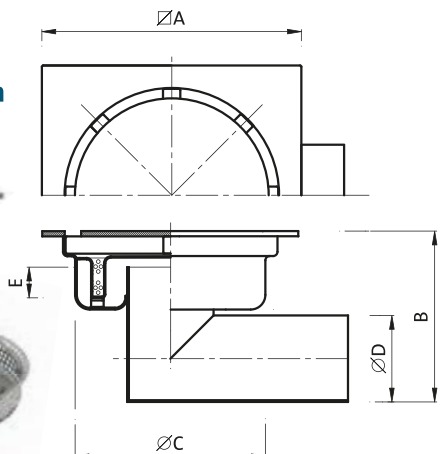

Features

Finish: **Sand-blast**

Also available with or without basket and with cover fastened with a screw.


On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P.012L	300	200	220	101,6 110	25	1600	16400	130
P.007L	300	260	220	101,6 110	60	1600	16400	130

GULLIES WITH HORIZONTAL OUTLET

PGR.025080L

**GULLY 250x250,
GRATING COVER
OUTLET \varnothing 80 mm**

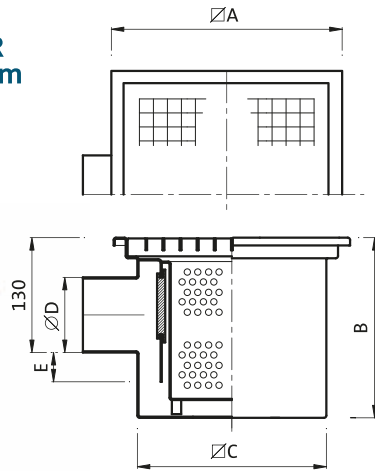

Features

Finish: **Sand-blast**


Standard grating cover: bearing surface 25x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Track of wheels		
PGR.025080L	250	250	215	80	60	80x80	120x120	80

PGR.030100L

**GULLY 300x300
GRATING COVER
OUTLET \varnothing 101,6 mm**

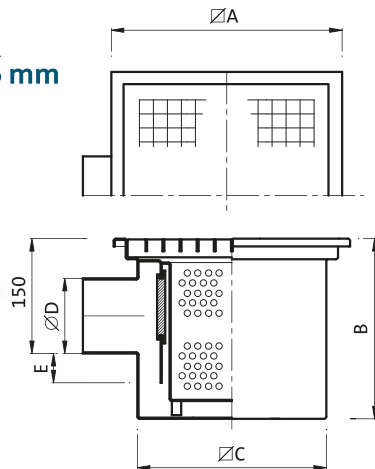

Features

Finish: **Sand-blast**


Standard grating cover: bearing surface 25x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Track of wheels		
PGR.030100L	300	250	265	101,6	60	80x80	120x120	130

PGR.040154L

**GULLY 400x400
GRATING COVER
OUTLET \varnothing 154 mm**

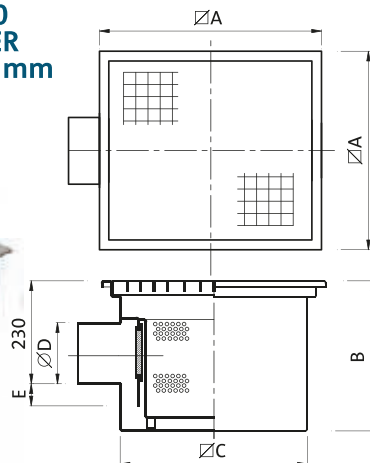

Features

Finish: **Sand-blast**


Standard grating cover: bearing surface 25x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Track of wheels		
PGR.040154L	400	350	365	154	60	80x80	120x120	220

PGR.050219L

**GULLY 500x500
GRATING COVER
OUTLET \varnothing 219 mm**

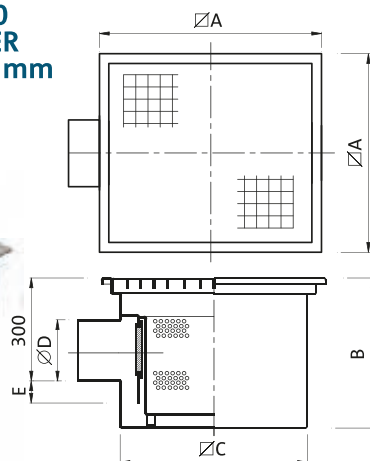

Features

Finish: **Sand-blast**


Standard grating cover: bearing surface 30x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Track of wheels		
PGR.050219L	500	450	465	219	60	80x80	120x120	270

P.062T GULLY 100x100
OUTLET \varnothing 40 mm

P.070T

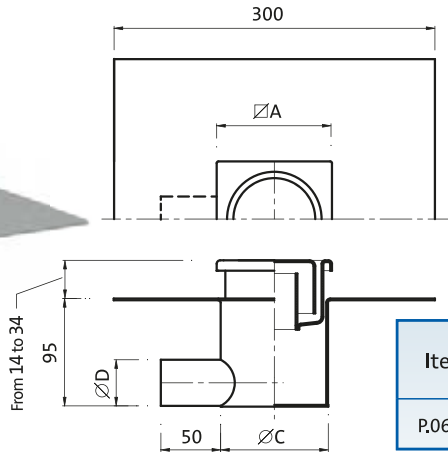

Features


Finish: **Sand-blast**

Also available with or without basket
and on request round model

Applicable for item **P. 070**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	$\varnothing A$	B	$\varnothing C$	$\varnothing D$	E	Concentrated load	Distributed load	Lt/min.
P.062T	100	Variable	90	40	33	200		12

P.002T GULLY 200x200
OUTLET \varnothing 63,5 mm

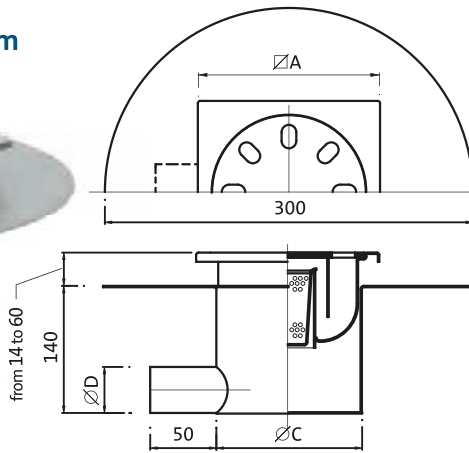


Features

Finish: **Sand-blast**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	$\varnothing A$	B	$\varnothing C$	$\varnothing D$	E	Concentrated load	Distributed load	Lt/min.
P002T	200	Variable	160	63,5	50	850	4600	46

P.005T GULLY 300x300
OUTLET
P.016T \varnothing 101,6/110 mm

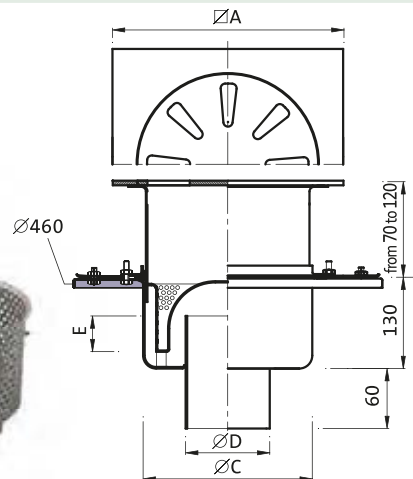

Features

Finish: **Sand-blast**


Also available with or without basket and on
request round model

Different heights if necessary.

Applicable for item **P. 016**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	$\varnothing A$	B	$\varnothing C$	$\varnothing D$	E	Concentrated load	Distributed load	Lt/min.
P005T	300	Variable	220	101,6 110	60	850	6500	130

P.007T GULLY 300x300
OUTLET
P.010T \varnothing 101,6/110 mm

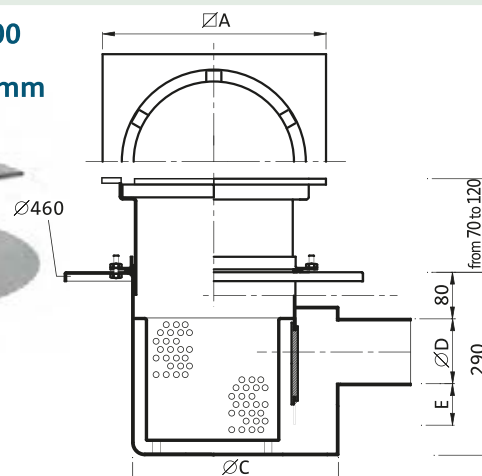

Features

Finish: **Sand-blast**

Also available with or without basket and on
request round model

Different heights if necessary.

Applicable for item **P. 010**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	$\varnothing A$	B	$\varnothing C$	$\varnothing D$	E	Concentrated load	Distributed load	Lt/min.
P.007T	300	Variable	250	101,6 110	60	1600	16400	130